

RIVERUN

RRS355

Riverun 5" Showerhead with 8" Wall Mounted 45 Degree Shower Arm



SHOWN IN RIVERUN 5" SHOWERHEAD WITH 8" WALL MOUNTED 45 DEGREE SHOWER ARM | RRS355

TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Adjustable Spray
Fittings Hole Diameter: 1 1/4"
Inlet Connection Size: 1/2"
Inlet Connection Type: Male NPT
Integrated Diverter: N
Pivot: Y
Primary Material: Brass
Restricted Maximum Flow Rate: 1.75 gpm
Water Pressure Maximum: 85.0 psi
Water Pressure Minimum: 20.0 psi
Water Pressure Recommended: 45.0 psi

INSPIRATION

This new American classic was designed with simplicity in mind. Featuring streamlined forms and honest details, it's the epitome of quiet elegance.

CODES & STANDARDS

PRODUCT FEATURES

Features a swivel 5" showerhead

Features an Adjustable Spray Pattern

Stocked in Nickel, and Brass

Available in 1.75gpm (6.6L/min) flow rate


CERTIFICATIONS

PRODUCT (NOTES)


RIVERUN

RRS355


Riverun 5" Showerhead with 8" Wall Mounted 45 Degree Shower Arm

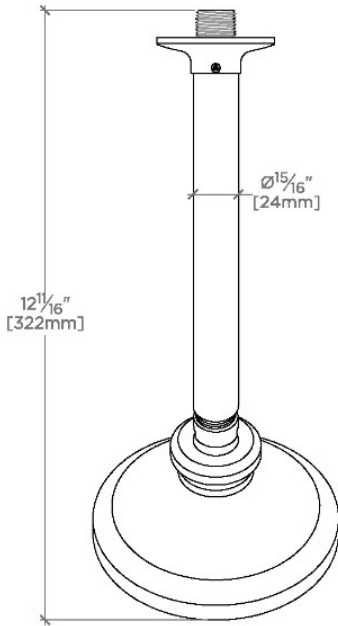

TOP VIEW SCALE: 3"=1'-0"

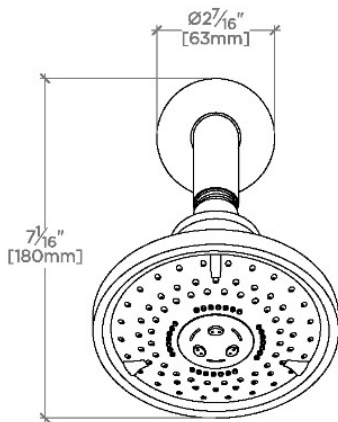

FRONT VIEW SCALE: 3"=1'-0"

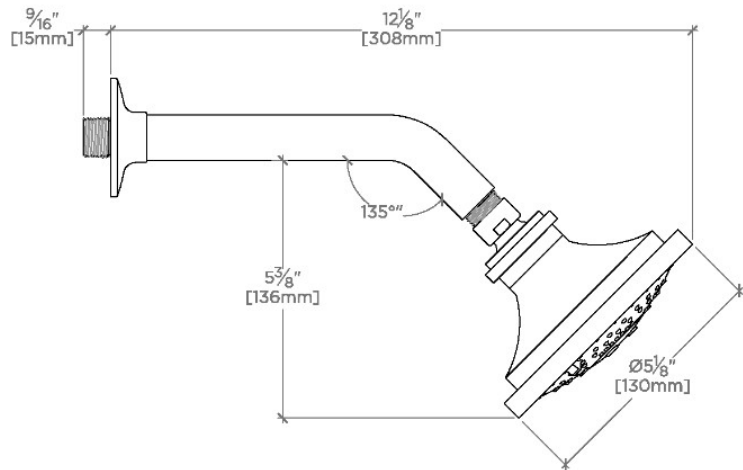

SIDE VIEW SCALE: 3"=1'-0"